



# LSH

## Garden Lighting

LITPA's LSH task luminaire is engineered to deliver precise and efficient illumination for targeted surfaces, while minimizing optical disturbances and light spill to the surrounding environment. This professional-grade fixture is ideal for applications where focused lighting, visual comfort, and integration flexibility are critical. The LSH offers a range of optical control options, allowing for fine-tuned beam angles tailored to the specific geometry and requirements of the illuminated surface. Its adaptable design supports multiple mounting configurations, including direct wall mounting with brackets or adjustable-height support legs for applications with varying elevation or terrain profiles. Constructed for performance and versatility, the LSH luminaire is suited for architectural facades, accent lighting, industrial work areas, or special-purpose lighting zones where controlled illumination and structural adaptability are essential.





RAL COLORS

Std.

9007

Opt.

9005

9006

7016

9016

LSH



| Code | Beam Angle | Luminous Flux | System Power | Weight |
|------|------------|---------------|--------------|--------|
| LSH  | 15°        | 720 lm        | 8 W          | 1.1 kg |
| LSH  | 30°        | 795 lm        | 8 W          | 1.1 kg |
| LSH  | 45°        | 880 lm        | 8 W          | 1.1 kg |

**Body:** Aluminum Extrusion


**Led:** Power Led

**Lens:** PMMA

**Voltage:** 220~240VAC

**Color Temperature:** 3000-4000-5000K, R-G-B-Amber

**Front Glass:** 4mm Thick Tempered Glass

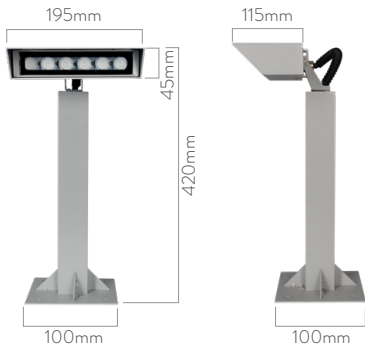

**BOX DIMENSIONS**  
22x21x43cm



**BOX WEIGHT**  
1.6 kg

