

# LSS

## Surface-Mounted Luminaires

LSS luminaires, a surface-mounted lighting series, offer a complete solution for spaces such as offices where glare control is essential. By improving light quality in the working environment, they help maximize employee productivity. The luminaires are available with 2-, 3-, or 4-louvre options, depending on the desired light output. Thanks to the use of high-quality materials, they provide excellent performance and significant energy savings.



RAL COLORS

Std.

9016

Opt.

9005

9006

LSS

IP20  

Code	Luminous Flux	System Power	Weight
LSS 60-60/3	3.000 lm	27 W	5.5 Kg
LSS 60-60/4	3.900 lm	35 W	5.7 Kg
LSS 30-30/2	2.350 lm	18 W	2.8 Kg
LSS 30-120/2	3.000 lm	27 W	5.8 Kg

**Body:** DKP sheet steel

**Diffuser:** Microprismatic lens

**Reflector:** Aluminum

**Beam Angle:** 70°

**Voltage:** 220~240 VAC

**Driver:** Included

**Color Temperature:** 2700-3000-4000-5000-6500K

**Led:** Mid Power



LSS/2

LSS/3


LSS/4

Optics



Prismatic

Opal

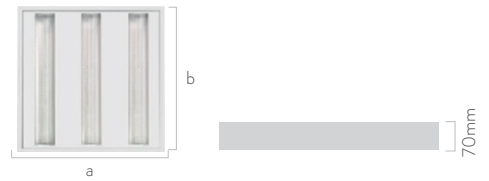

Code	a	b
LSS 60-60/4	600 mm	600 mm
LSS 60-60/3	600 mm	600 mm
LSS 30-30/2	300 mm	300 mm
LSS 30-120/2	300 mm	1200mm



BOX DIMENSIONS

LSS 60-60/4	67x61x9cm
LSS 60-60/3	67x61x9cm
LSS 30-30/2	37x31x9cm
LSS 30-120/2	127x31x9cm



BOX WEIGHT

LSS/60-60/4	6 kg
LSS/60-60/3	5.8 kg
LSS/30-30	3.1 kg
LSS/30-120	6.1 kg

