

LUMOX


Street Lighting Luminaires

Designed for modern urban lighting applications, this LED street luminaire delivers superior energy efficiency and extended operational lifespan. Its advanced optical system provides precise, environmentally optimized light distribution, minimizing light pollution and enhancing visual comfort. The robust aluminum housing ensures excellent durability and corrosion resistance under harsh weather conditions. Equipped with an easy-to-use mounting bracket, it facilitates rapid and secure installation. With low power consumption and reduced maintenance requirements, this luminaire is ideal for streets, parks, and industrial environments.






The luminaire's top cover can be opened without tools, thanks to the integrated clip mechanism.

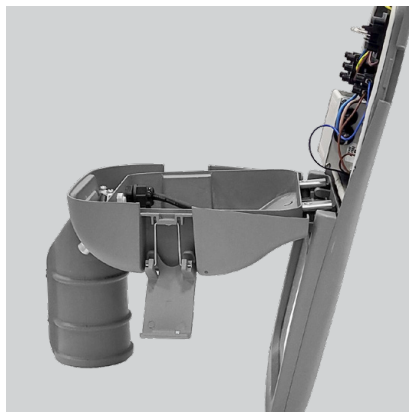

Lumox luminaires have independently separated light source and power supply compartments, enabling on-site maintenance when needed.

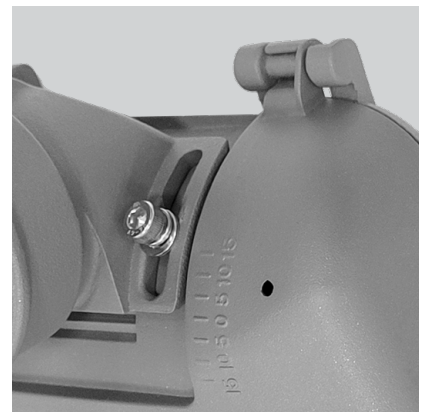

The markings on the luminaire indicate its tilt angle, enabling precise adjustment to achieve the optimal lighting direction.

RAL COLORS

Std.
9007

Opt.
9005
9006
7016
9016




YSC1

Code	Led	Luminous Flux	System Power	Weight
YSC1/50	Power or Midpower	7.000 lm	50W	3.7kg
YSC1/30	Power or Midpower	4.200 lm	30W	3.7kg

Body: Aluminum Injection
Driver: Included
Lens: PMMA

Voltage: 220-240 VAC
Led: High-Power Led


Color Temperature: 2700-3000-4000-5000-6500K
Front Glass: 93% transparency tempered glass

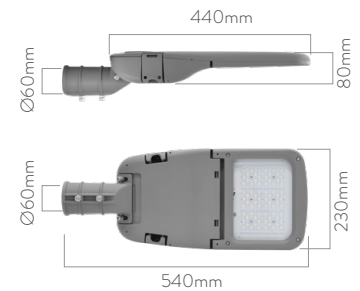

BOX DIMENSIONS
 58.5x28.5x18 cm



BOX WEIGHT
 4.2 kg





RAL COLORS
Std. 9007
Opt. 9005 9006 7016 9016

YSC2




Code	Led	Luminous Flux	System Power	Weight
YSC2/100	Power or Midpower	14.000 lm	100W	5.7kg
YSC2/80	Power or Midpower	11.200 lm	80W	5.7kg

Body: Aluminum Injection
Driver: Included
Lens: PMMA

Voltage: 220-240 VAC
Led: High-Power Led

Color Temperature: 2700-3000-4000-5000-6500K
Front Glass: 93% transparency tempered glass



BOX DIMENSIONS
68.5x34.5x18 cm



BOX WEIGHT
6.7 kg

