

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	4843.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	33.8V x 34.0H
	At 50% of Imax	19.9V x 20.1H
	At 90% of Imax	9.4V x 9.8H

Beam Flux	Total	1000.8 lumens per klm.
	To 10% of Imax	549.1 lumens per klm.
	To 50% of Imax	348.4 lumens per klm.
	To 90% of Imax	106.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.1 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: LITPA
Test Date: 22/09/2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks: KYH-XL 625W 4000K

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.44V I:0A P:0W PF:0.0000 Freq:50.01Hz Lamp Flux:75469.4x1 lm		
NAME: KYH-XL	TYPE:OUTDOOR	WEIGHT:22 kg
SPEC.:625 WATT	DIM.: 540X660X70	SERIAL No.:
MFR.: LITPA AYDINLATMA	SUR.:	Shielding Angle:

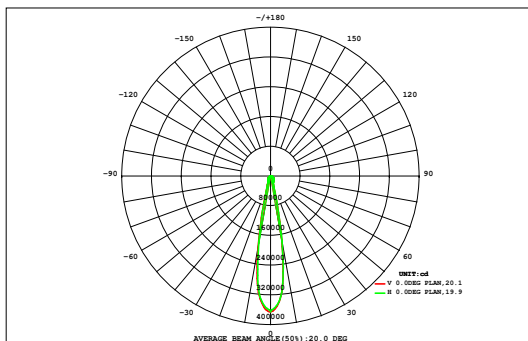

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	KYH-XL	Imax (cd)	365565
NOMINAL POWER (W)	625	AVAILABILITY (%)	54.8
RATED VOLTAGE (V)	230.0	Avai. FLUX (lm)	41330
NOMINAL FLUX (lm)	75469.4	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	75469
TEST VOLTAGE (V)	230	θ @50% (H,V)	20,20DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.14	0.39	0.88	1.63	2.60	3.58	4.34	4.69	4.55	4.05	3.28	2.35	1.48	0.84	0.40	0.16	0.03	35.4	0.00
90	0.02	0.14	0.39	0.88	1.63	2.60	3.58	4.34	4.69	4.55	4.05	3.28	2.35	1.48	0.84	0.40	0.16	0.03	35.4	0.00
80	0.05	0.54	2.47	6.61	13.0	20.9	28.8	34.9	37.5	36.8	33.4	27.9	20.4	12.8	6.56	2.55	0.62	0.06	286	0.00
70	0.10	1.55	7.31	19.0	36.2	56.7	77.6	92.0	98.9	98.3	89.6	75.8	57.1	37.0	19.4	7.63	1.74	0.12	776	0.00
60	0.17	3.05	14.2	35.3	66.5	102	136	160	173	173	158	134	102	68.5	36.5	14.9	3.41	0.21	1381	0.00
50	0.27	4.81	21.5	52.3	97.0	147	194	233	257	257	234	195	149	101	55.5	23.0	5.39	0.32	2028	0.00
40	0.37	6.54	28.1	68.5	124	189	254	314	352	352	316	258	194	130	72.9	30.5	7.40	0.44	2698	0.00
30	0.46	8.10	33.6	81.9	149	228	316	408	500	501	410	318	233	155	87.0	36.6	9.12	0.55	3475	0.00
20	0.54	9.27	37.8	91.2	166	259	376	683	1796	1767	695	379	263	173	97.1	41.4	10.4	0.63	6845	3139
10	0.58	9.89	40.2	96.4	175	276	432	1640	7565	7487	1778	449	281	185	104	44.1	11.0	0.68	20574	17822
0	0.58	9.87	40.1	95.7	173	272	422	1543	7353	7496	1791	456	286	186	104	44.2	11.0	0.68	20285	17516
-10	0.53	9.23	37.4	89.5	162	253	367	651	1665	1679	689	383	265	175	98.4	41.6	10.3	0.64	6577	2853
-20	0.46	8.07	33.0	79.8	145	224	312	403	487	488	406	318	234	155	87.0	36.6	9.06	0.55	3425	0.00
-30	0.36	6.49	27.4	67.0	123	185	252	311	347	347	312	257	193	130	72.1	30.0	7.31	0.44	2668	0.00
-40	0.26	4.69	20.7	51.6	95.9	144	189	229	251	252	231	195	150	100	55.0	22.6	5.34	0.32	1997	0.00
-50	0.16	2.92	13.4	34.2	64.8	99.2	129	154	168	169	158	135	104	67.7	36.7	14.7	3.37	0.21	1356	0.00
-60	0.09	1.43	6.85	18.3	35.0	55.3	73.1	86.9	95.2	95.8	90.0	76.1	57.0	36.3	19.4	7.53	1.69	0.12	756	0.00
-70	0.05	0.49	2.29	6.26	12.4	19.9	27.1	32.4	35.1	35.6	33.1	27.2	20.1	12.6	6.54	2.51	0.59	0.06	274	0.00
-80	0.02	0.12	0.34	0.79	1.51	2.38	3.24	3.90	4.19	4.16	3.80	3.12	2.31	1.49	0.81	0.38	0.14	0.03	32.7	0.00
-90	0.02	0.12	0.34	0.79	1.51	2.38	3.24	3.90	4.19	4.16	3.80	3.12	2.31	1.49	0.81	0.38	0.14	0.03	32.7	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	5.07	87.2	367	896	1642	2536	3594	6983	21188	21242	7433	3690	2613	1729	960	401	98.1	6.11	75469	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2666	17681	17758	3225	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	41330

one-half-peak spread: U:9.9,D:10.1 , L:9.8,R:10.4


NEMA Beam Type: Type 3

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: LITPA
Test Date: 22/09/2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks: KYH-XL 625W 4000K

ISOCANDELA DIAGRAM

Test:U:230.44V I:0A P:0W PF:0.0000 Freq:50.01Hz Lamp Flux:75469.4x1 lm		
NAME: KYH-XL	TYPE:OUTDOOR	WEIGHT:22 kg
SPEC.:625 WATT	DIM.: 540X660X70	SERIAL No.:
MFR.: LITPA AYDINLATMA	SUR.:	Shielding Angle:

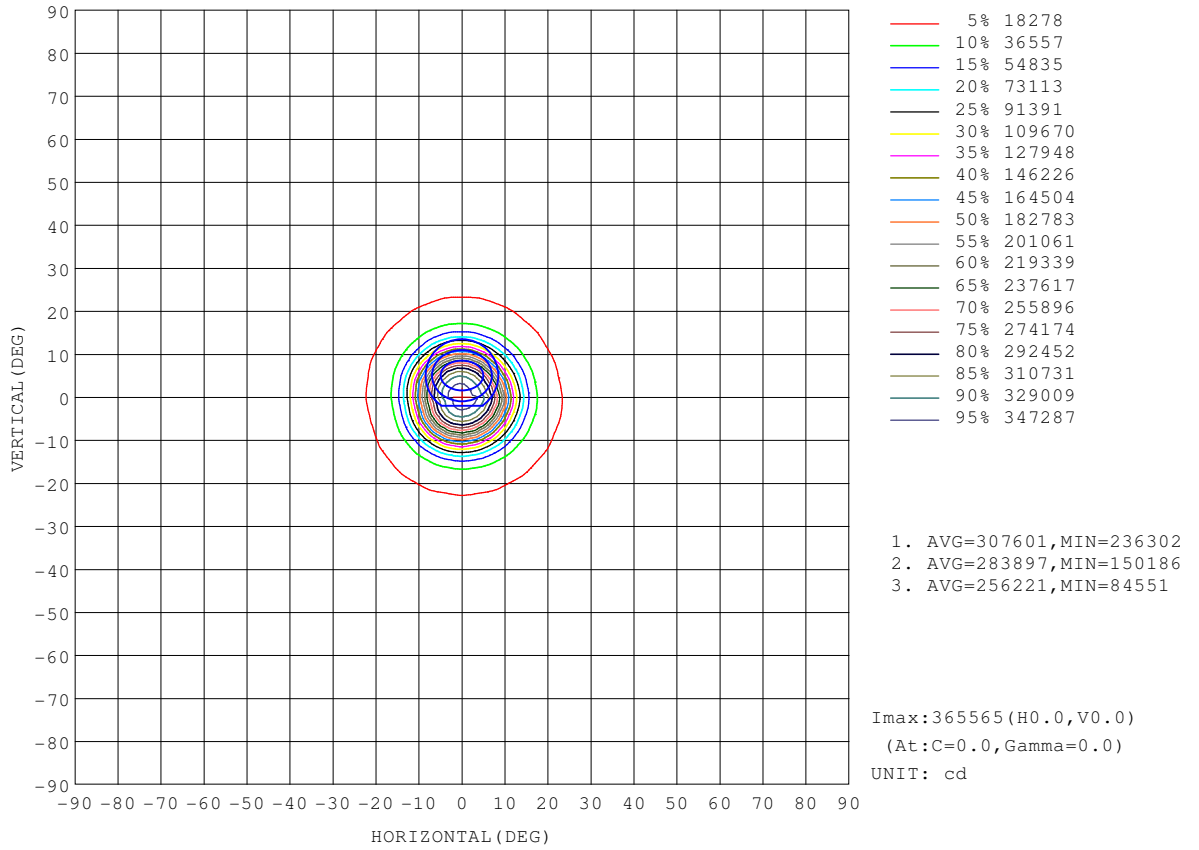


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:LITPA
Test Date:22/09/2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks: KYH-XL 625W 4000K

ISOLUX DIAGRAM


Test:U:230.44V I:0A P:0W PF:0.0000 Freq:50.01Hz Lamp Flux:75469.4x1 lm		
NAME: KYH-XL	TYPE:OUTDOOR	WEIGHT:22 kg
SPEC.:625 WATT	DIM.: 540X660X70	SERIAL No.:
MFR.: LITPA AYDINLATMA	SUR.:	Shielding Angle:

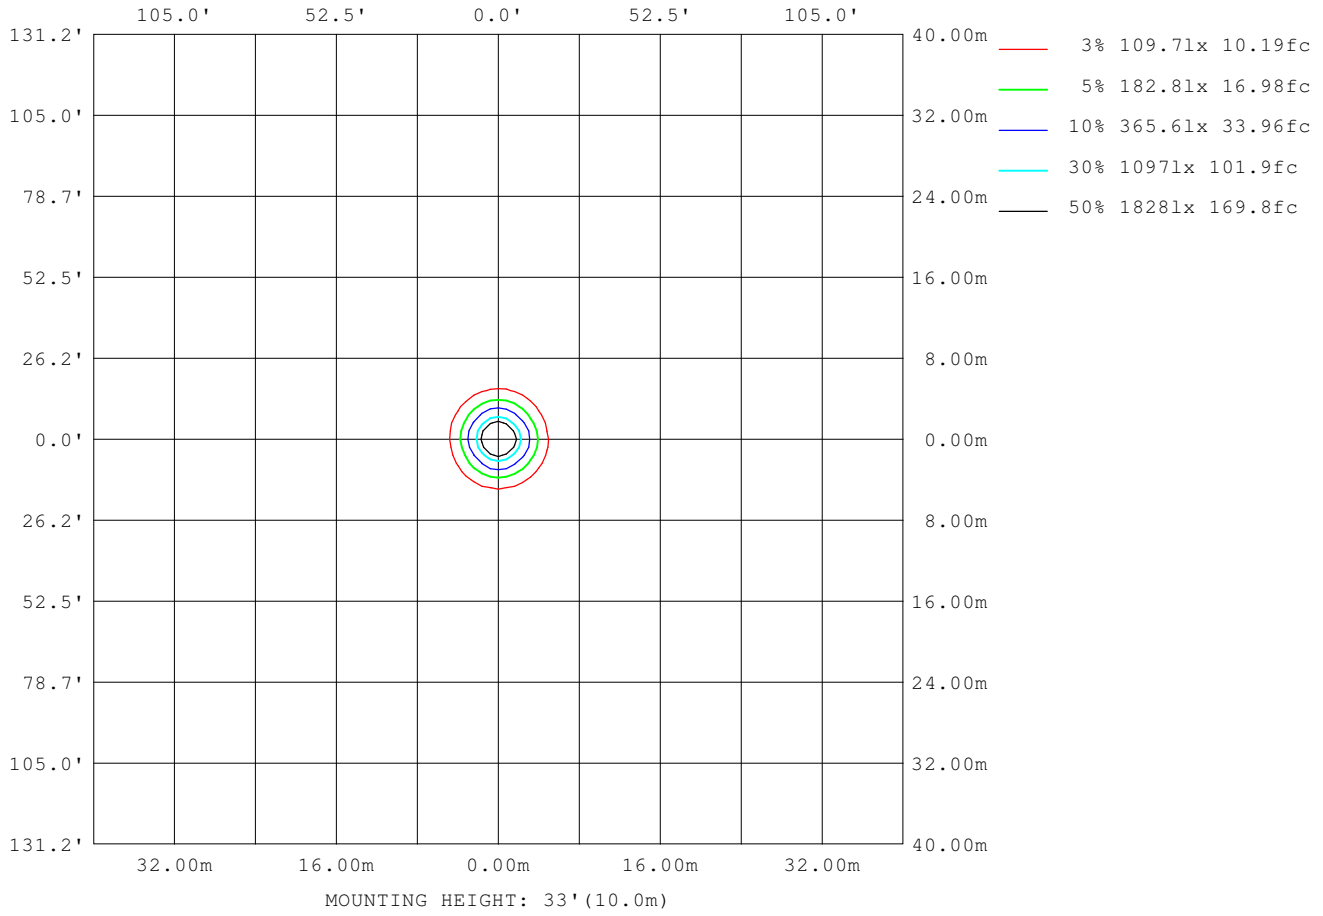

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: LITPA
Test Date: 22/09/2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks: KYH-XL 625W 4000K

Planar Illuminance Curve

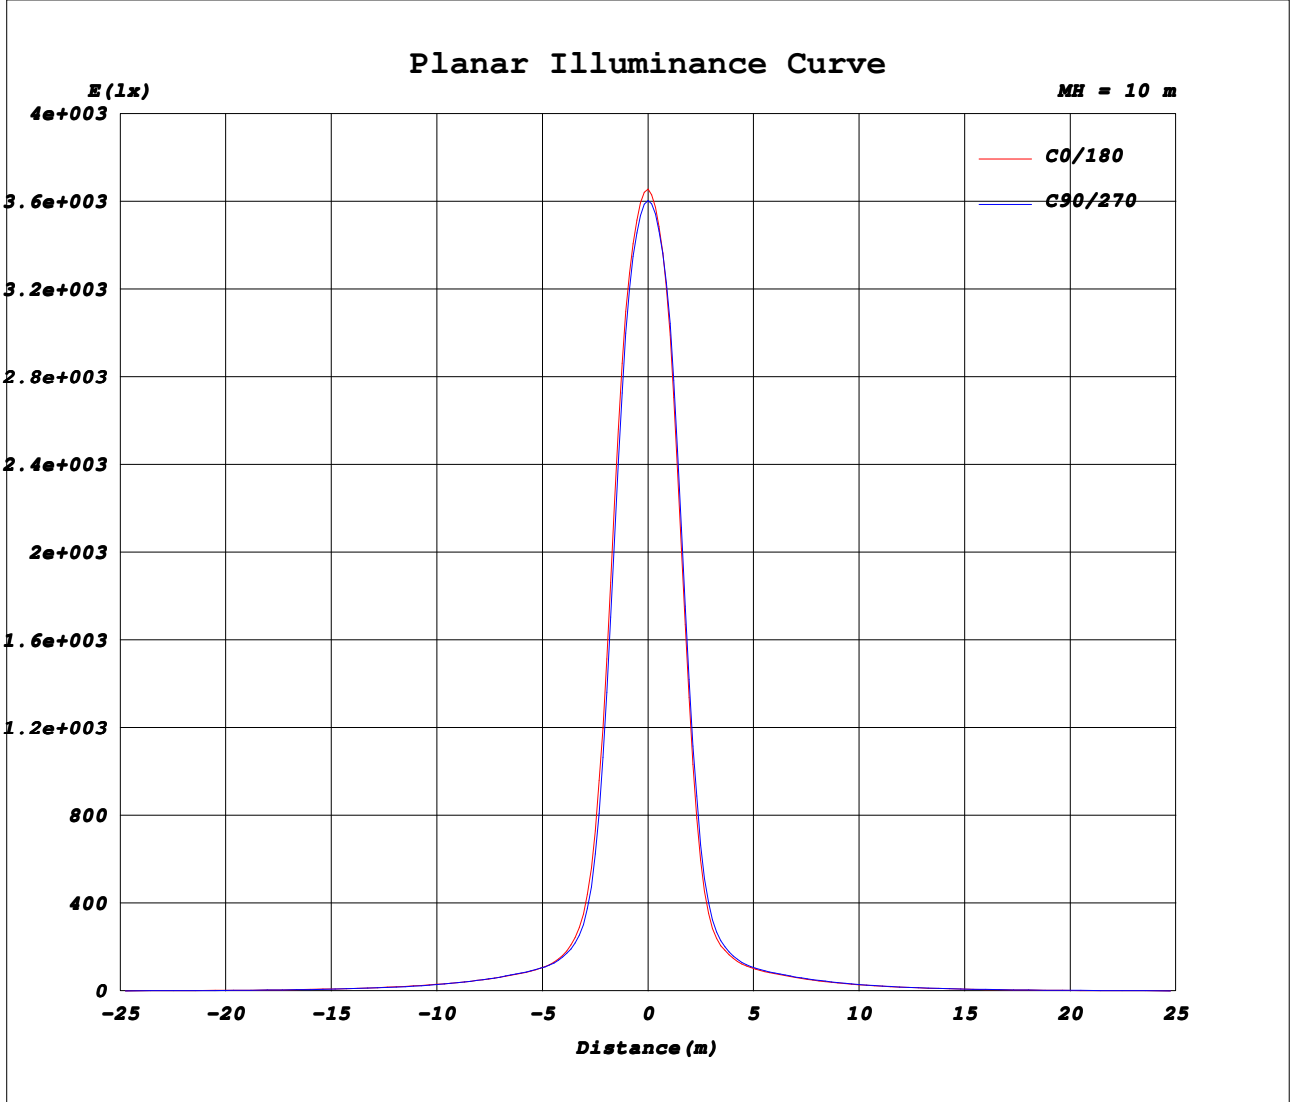


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: LITPA
Test Date: 22/09/2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks: KYH-XL 625W 4000K

AAI Figure

Test:U:230.44V I:0A P:0W PF:0.0000 Freq:50.01Hz Lamp Flux:75469.4x1 lm		
NAME: KYH-XL	TYPE:OUTDOOR	WEIGHT:22 kg
SPEC.:625 WATT	DIM.: 540X660X70	SERIAL No.:
MFR.: LITPA AYDINLATMA	SUR.:	Shielding Angle:

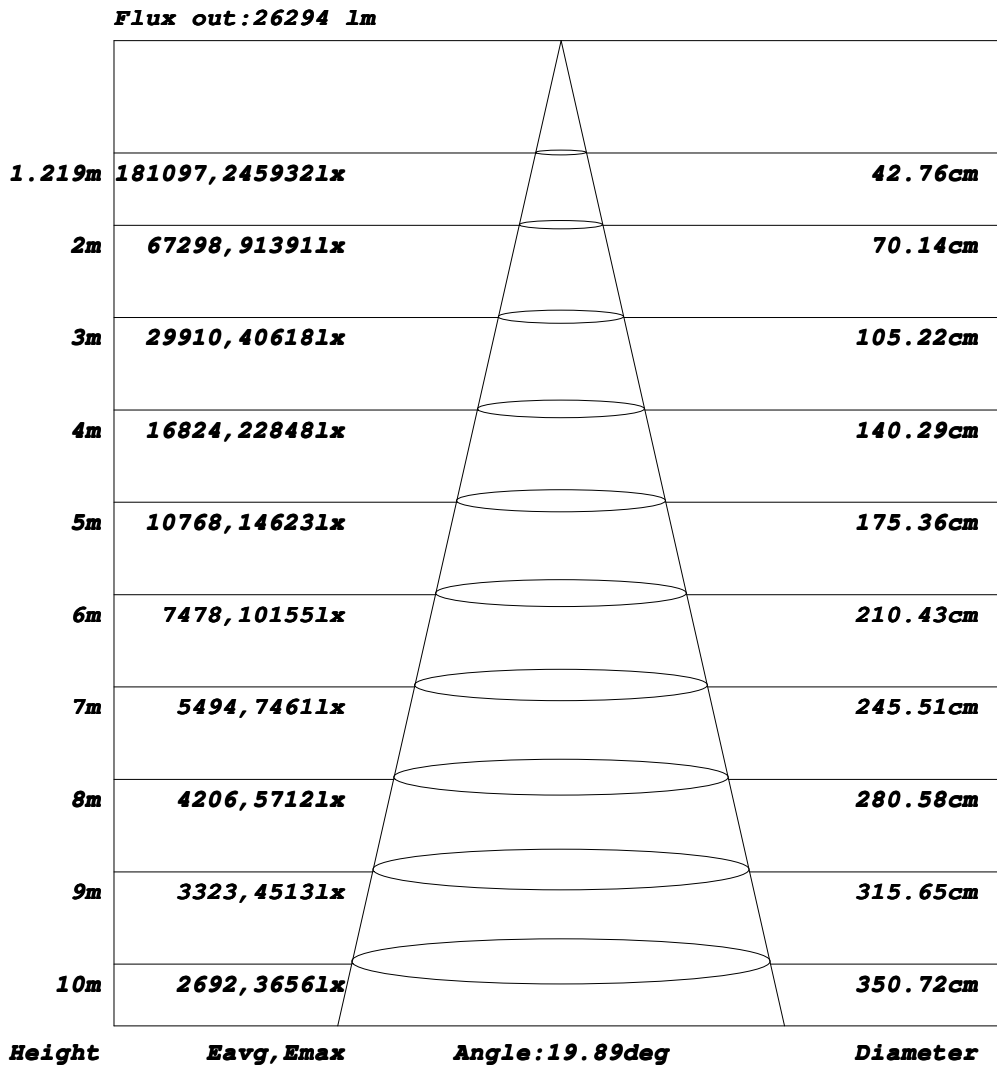

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:LITPA
Test Date:22/09/2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks: KYH-XL 625W 4000K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.44V I:0A P:0W PF:0.0000 Freq:50.01Hz Lamp Flux:75469.4x1 lm		
NAME: KYH-XL	TYPE:OUTDOOR	WEIGHT:22 kg
SPEC.:625 WATT	DIM.: 540X660X70	SERIAL No.:
MFR.: LITPA AYDINLATMA	SUR.:	Shielding Angle:

Table--1

UNIT: μ Á100cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
-85	0.05	0.08	0.10	0.14	0.17	0.22	0.28	0.32	0.39	0.47	0.56	0.62	0.68	0.76	0.83	0.83	0.82	0.85	0.87
-80	0.05	0.10	0.18	0.27	0.42	0.65	0.96	1.32	1.71	2.20	2.72	3.08	3.43	3.86	4.29	4.43	4.48	4.64	4.73
-75	0.05	0.14	0.27	0.52	0.94	1.61	2.50	3.38	4.33	5.48	6.67	7.69	8.70	9.60	10.4	10.8	11.0	11.4	11.6
-70	0.05	0.18	0.42	0.94	1.83	3.10	4.67	6.35	8.24	10.2	12.2	14.0	15.7	17.0	18.1	18.9	19.4	19.9	20.3
-65	0.05	0.22	0.62	1.58	3.04	5.08	7.51	10.3	13.1	16.0	19.3	22.2	24.7	26.6	28.3	29.8	30.6	31.4	31.9
-60	0.05	0.27	0.90	2.37	4.55	7.33	10.9	14.6	18.5	22.7	26.9	30.8	33.8	36.3	38.8	40.8	42.1	43.0	43.6
-55	0.05	0.31	1.26	3.24	6.24	9.97	14.5	19.2	24.5	29.8	35.3	40.0	43.5	46.7	50.0	52.6	54.3	55.6	56.4
-50	0.05	0.37	1.69	4.23	7.97	12.8	18.3	24.3	30.8	37.5	43.7	48.9	53.5	57.7	61.7	65.0	67.0	68.6	69.4
-45	0.05	0.45	2.13	5.33	9.85	15.7	22.0	29.1	37.0	44.5	51.5	57.6	63.5	68.7	73.4	77.8	80.7	82.8	83.9
-40	0.05	0.52	2.53	6.47	11.7	18.4	25.4	34.0	42.5	51.0	58.6	65.9	73.2	80.0	86.1	91.9	95.9	98.2	99.5
-35	0.05	0.59	2.94	7.50	13.6	20.8	28.7	38.0	47.5	57.2	65.7	74.1	83.0	91.6	99.0	106	111	114	117
-30	0.05	0.67	3.38	8.38	15.2	23.0	32.0	41.8	52.0	62.4	72.5	82.4	92.4	103	112	121	129	131	135
-25	0.05	0.74	3.77	9.24	16.6	24.9	34.9	45.3	56.1	67.4	78.6	89.9	101	113	126	135	146	154	159
-20	0.05	0.80	4.10	9.95	17.8	26.6	37.3	48.3	59.8	71.6	83.5	96.0	110	123	137	158	187	218	232
-15	0.05	0.85	4.35	10.6	18.9	28.1	39.4	50.7	62.9	75.2	87.6	101	116	132	154	203	292	444	528
-10	0.05	0.88	4.53	11.0	19.7	29.3	41.1	52.9	65.3	78.0	90.8	105	121	138	180	284	661	1385	1786
-5	0.05	0.90	4.64	11.3	20.2	30.1	42.2	54.4	67.2	80.4	93.6	109	125	147	204	408	1340	2764	3239
0	0.05	0.91	4.68	11.3	20.5	30.5	42.7	55.2	68.2	81.7	95.5	112	129	154	224	505	1748	3244	3656
5	0.05	0.90	4.65	11.3	20.3	30.2	42.4	54.8	67.7	81.2	94.8	110	127	150	213	447	1431	2829	3267
10	0.05	0.89	4.55	11.0	19.8	29.6	41.6	53.6	66.3	79.5	92.9	107	125	145	188	301	710	1475	1837
15	0.05	0.85	4.38	10.6	19.1	28.5	40.1	51.8	64.1	77.0	89.9	104	120	134	159	212	312	485	570
20	0.05	0.81	4.14	9.98	18.0	27.1	38.1	49.5	61.2	73.5	85.6	97.8	111	126	140	160	195	230	243
25	0.05	0.75	3.83	9.27	16.8	25.4	35.5	46.6	57.6	68.9	80.0	91.1	103	115	126	137	148	159	162
30	0.05	0.68	3.45	8.42	15.4	23.5	32.6	43.2	53.2	63.5	73.7	84.0	94.1	103	112	123	128	134	135
35	0.05	0.60	2.99	7.49	13.8	21.3	29.4	39.0	48.2	57.5	67.0	76.0	84.3	92.0	100	107	112	117	117
40	0.05	0.53	2.57	6.47	12.0	18.9	26.2	34.5	42.8	51.3	59.9	67.5	74.2	81.1	87.7	92.9	97.2	100	101
45	0.05	0.46	2.15	5.41	10.2	16.3	22.7	29.6	37.2	44.9	52.7	58.9	64.5	70.3	75.3	79.3	82.7	84.8	85.4
50	0.05	0.38	1.72	4.38	8.42	13.6	19.1	24.7	31.3	38.1	44.6	50.3	55.3	60.0	63.6	66.6	69.2	70.5	70.7
55	0.05	0.32	1.31	3.41	6.60	10.6	15.2	20.1	25.1	30.9	36.1	41.0	45.7	49.6	52.1	54.3	56.3	57.1	57.2
60	0.05	0.27	0.93	2.50	4.80	7.94	11.4	15.2	19.1	23.3	27.5	31.5	35.6	38.8	40.7	42.4	43.8	44.4	44.4
65	0.05	0.23	0.65	1.69	3.33	5.42	7.83	10.8	13.7	16.6	19.3	22.6	25.5	28.0	29.9	31.2	32.3	32.7	32.5
70	0.05	0.19	0.44	1.02	2.10	3.34	4.93	6.68	8.78	10.8	12.8	14.7	16.8	18.3	19.7	20.7	21.1	21.1	20.8
75	0.05	0.15	0.29	0.57	1.06	1.76	2.55	3.56	4.67	5.70	6.83	8.05	9.17	10.1	10.8	11.7	12.3	12.2	12.0
80	0.05	0.11	0.19	0.30	0.49	0.72	1.07	1.43	1.92	2.34	2.73	3.27	3.81	4.16	4.44	4.79	5.10	5.08	4.96
85	0.05	0.08	0.11	0.16	0.20	0.25	0.30	0.36	0.45	0.52	0.59	0.70	0.80	0.87	0.94	0.98	1.01	1.03	1.03
90	0.05	0.05	0.05	0.05	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.07	0.06	0.06	0.06

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:LITPA
Test Date:22/09/2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks: KYH-XL 625W 4000K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.44V I:0A P:0W PF:0.0000 Freq:50.01Hz Lamp Flux:75469.4x1 lm		
NAME: KYH-XL	TYPE:OUTDOOR	WEIGHT:22 kg
SPEC.:625 WATT	DIM.: 540X660X70	SERIAL No.:
MFR.: LITPA AYDINLATMA	SUR.:	Shielding Angle:

Table--2

UNIT: μ 100cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.06	0.06	0.07	0.07	
-85	0.84	0.80	0.80	0.79	0.72	0.65	0.59	0.54	0.46	0.38	0.33	0.29	0.23	0.20	0.17	0.14	0.11	0.07	
-80	4.63	4.46	4.34	4.17	3.76	3.34	3.03	2.69	2.20	1.72	1.36	1.02	0.72	0.48	0.33	0.22	0.15	0.07	
-75	11.6	11.4	11.0	10.4	9.57	8.63	7.80	6.76	5.55	4.50	3.52	2.64	1.76	1.14	0.64	0.35	0.19	0.07	
-70	20.1	19.8	19.8	19.0	17.6	15.9	14.5	12.8	10.7	8.50	6.75	5.04	3.42	2.10	1.18	0.55	0.22	0.07	
-65	31.6	31.1	30.6	29.5	27.5	25.2	22.8	19.7	16.6	13.7	11.0	8.11	5.58	3.48	1.88	0.82	0.27	0.07	
-60	43.4	42.7	41.9	40.3	38.2	35.5	32.1	28.0	23.6	19.4	15.7	11.8	8.14	5.10	2.80	1.15	0.34	0.07	
-55	55.9	54.9	53.7	51.6	48.9	45.9	41.9	36.8	31.1	25.9	20.9	15.8	11.0	6.99	3.83	1.57	0.40	0.07	
-50	68.9	67.7	66.1	63.3	60.0	56.0	51.3	45.4	39.1	32.6	26.0	19.8	14.1	8.96	4.95	2.04	0.49	0.07	
-45	83.0	81.3	78.7	74.8	70.7	65.7	60.0	53.6	46.4	39.1	31.1	23.7	17.2	10.9	6.15	2.52	0.59	0.07	
-40	98.3	96.0	92.4	87.2	81.9	75.7	68.7	61.4	53.5	45.0	36.4	27.3	20.0	13.0	7.33	3.04	0.67	0.07	
-35	114	111	106	99.9	93.1	85.5	77.3	69.2	60.5	50.6	41.0	31.0	22.8	15.1	8.42	3.53	0.76	0.07	
-30	131	129	121	113	104	94.8	85.9	76.6	66.5	55.9	45.4	35.1	25.4	17.0	9.43	4.00	0.86	0.07	
-25	154	147	136	127	115	104	93.7	83.2	72.1	60.5	49.5	38.7	27.6	18.5	10.3	4.42	0.95	0.07	
-20	220	189	161	140	126	113	100	88.7	76.9	64.9	53.0	41.4	29.6	19.9	11.1	4.79	1.02	0.07	
-15	451	308	212	161	137	121	105	93.4	81.3	68.6	56.0	43.7	31.2	21.0	11.8	5.08	1.07	0.07	
-10	1361	701	320	195	147	127	111	97.4	84.8	71.3	58.0	45.2	32.4	21.8	12.3	5.29	1.11	0.07	
-5	2785	1439	498	234	159	132	115	99.8	86.5	72.8	59.2	46.2	33.1	22.3	12.6	5.41	1.13	0.07	
0	3312	1950	623	253	162	132	115	101	87.2	73.4	59.6	46.5	33.3	22.5	12.7	5.45	1.14	0.07	
5	2775	1421	504	229	154	128	112	98.6	85.7	72.3	58.8	46.0	33.1	22.3	12.6	5.41	1.14	0.07	
10	1425	704	319	191	147	125	109	95.8	83.1	70.3	57.3	44.9	32.3	21.8	12.4	5.28	1.12	0.07	
15	473	318	215	160	135	120	105	92.7	80.4	67.8	55.0	43.2	31.0	21.0	11.9	5.07	1.08	0.07	
20	231	196	161	141	126	111	99.7	88.3	76.7	64.7	52.5	41.0	29.3	19.9	11.2	4.78	1.03	0.07	
25	160	148	138	126	116	104	93.2	82.6	71.9	60.9	49.4	38.5	27.5	18.6	10.4	4.40	0.95	0.07	
30	134	129	123	113	104	95.6	85.9	76.0	66.4	56.2	45.7	35.5	25.4	17.0	9.54	3.98	0.87	0.07	
35	117	112	107	101	93.7	85.9	77.8	69.2	60.4	50.9	41.5	32.1	23.1	15.3	8.51	3.50	0.76	0.07	
40	100	97.8	93.7	88.6	82.2	75.6	69.0	61.9	53.9	45.3	36.8	28.2	20.4	13.3	7.39	3.01	0.67	0.07	
45	84.9	82.8	79.5	75.6	70.9	65.5	60.0	54.2	47.0	39.2	31.5	24.1	17.5	11.1	6.18	2.48	0.59	0.07	
50	70.3	68.8	66.3	63.3	59.7	55.3	50.5	45.6	39.6	32.7	26.1	19.9	14.4	9.09	4.96	2.03	0.49	0.07	
55	57.0	55.9	53.8	51.4	48.6	45.1	41.1	36.9	31.6	26.1	20.3	15.8	11.2	7.14	3.83	1.60	0.40	0.07	
60	44.2	43.4	41.8	39.8	37.7	35.0	31.7	28.1	24.1	19.7	15.5	11.8	8.19	5.32	2.81	1.21	0.34	0.07	
65	32.4	31.9	30.6	29.0	27.6	25.6	22.9	20.0	17.1	13.9	10.9	7.99	5.71	3.58	1.93	0.83	0.27	0.07	
70	20.7	20.3	19.5	18.5	17.6	16.3	14.4	12.5	10.6	8.72	6.65	4.93	3.48	2.24	1.23	0.55	0.23	0.07	
75	11.9	11.7	11.2	10.5	9.89	9.09	7.87	6.73	5.70	4.63	3.53	2.57	1.82	1.16	0.67	0.36	0.19	0.07	
80	4.98	4.90	4.61	4.25	3.98	3.64	3.09	2.59	2.20	1.82	1.38	1.06	0.75	0.54	0.35	0.23	0.15	0.07	
85	0.99	0.93	0.88	0.81	0.77	0.71	0.60	0.51	0.47	0.41	0.34	0.29	0.25	0.22	0.18	0.15	0.11	0.07	
90	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:LITPA
Test Date:22/09/2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks: KYH-XL 625W 4000K