

EOS







Decorative

Fixtures

The EOS series combines elegance and harmony to compliment the modern office. EOS provides an uninterrupted stream of light without disclosing the connection points. Its easy installation, combined with the lighting design and decorative features promote a relaxing atmosphere. High efficiency T5 lamps are used in the fixtures. Custom-designed Miro aluminum that reflects light with high efficiency is used for the reflector.

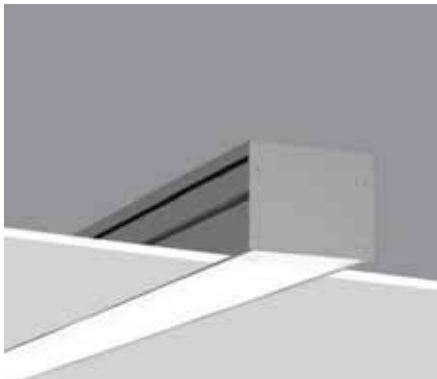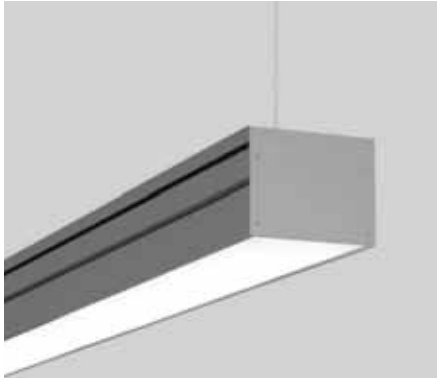

EOS is available in three types: 'surface mounted'; 'pendant'; and 'recessed'.



The reflector lamels are specially designed to avoid shadows in the connection points of the fixtures. This feature makes it possible for the fixture to be seen due to the continual operation of the reflector lamels.





Lamp Type	Watt
SLS 24	24W
SLS 39	39W
SLS 54	54W

Continuous T5 Lamp choice
Provides a solution to minimize dark spots
between two lamps (light-band)



SURFACE OR PENDANT DECORATIVE FIXTURES / EOS (DFR)



DFR/DP1



Description

Body: Extruded aluminum painted with min. 80 micron electrostatic powder paint.

Double Parabolic Bright aluminum Louvre:

Manufactured of (99,9%) pure bright aluminum.

Code	Lamp	Color
DFR 114/DP1	1x14W FH	Gray
DFR 128/DP1	1x28W FH	Gray
DFR 154/DP1	1x54W FQ	Gray


Box Dimensions

Inside box 1 PCS.

DFR 114/DP1	130x 620x100 mm
DFR 128/DP1	130x1220x100 mm
DFR 154/DP1	130x1220x100 mm

Weight

DFR 114/DP1	3.100 gr
DFR 128/DP1	6.200 gr
DFR 154/DP1	6.200 gr



cd/klm
— C0-C180 — C90-C270

Protection: IP20



DFR/OP



Description

Body: Extruded aluminum painted with min. 80 micron electrostatic powder paint.

Opal Diffuser:

Manufactured of 2,8 mm thick opal acrylic.

Code	Lamp	Color
DFR 114/OP	1x14W FH	Gray
DFR 128/OP	1x28W FH	Gray
DFR 154/OP	1x54W FQ	Gray


Box Dimensions

Inside box 1 PCS.

DFR 114/OP	130x 620x100 mm
DFR 128/OP	130x1220x100 mm
DFR 154/OP	130x1220x100 mm

Weight

DFR 114/OP	3.100 gr
DFR 128/OP	6.200 gr
DFR 154/OP	6.200 gr




cd/klm
— C0-C180 — C90-C270

Protection: IP20




Lamp

Dimensions



Code	a	b	c
DFR 114	600mm	85mm	110mm
DFR 128	1200mm	85mm	110mm
DFR 154	1200mm	85mm	110mm
DFR 135	1500mm	85mm	110mm

DFR/LS

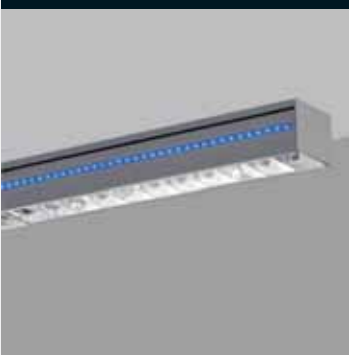

DFR/AT



Code	Lamp	Weight
DFR/AT	LED Red 4.8W/mt. 60 Pcs./mt. LED Green 4.8W/mt. 60 Pcs./mt. LED Blue 4.8W/mt. 60 Pcs./mt. LED Yellow 4.8W/mt. 60 Pcs./mt. LED White 4.8W/mt. 60 Pcs./mt. LED RGB 7.2W/mt. 30 Pcs./mt. LED RGB 14.4W/mt. 60 Pcs./mt.	50 gr

Accessories
DFR-AT Suspension Wire
DFR/LS

LED Red 4.8W/mt. 60 Pcs./mt.
LED Green 4.8W/mt. 60 Pcs./mt.
LED Blue 4.8W/mt. 60 Pcs./mt.
LED Yellow 4.8W/mt. 60 Pcs./mt.
LED White 4.8W/mt. 60 Pcs./mt.
LED RGB 7.2W/mt. 30 Pcs./mt.
LED RGB 14.4W/mt. 60 Pcs./mt.

50 gr



RECESSED DECORATIVE FIXTURES / EOS (DFG)



DFG/DP1



Description

Body: Extruded aluminum painted with min. 80 micron electrostatic powder paint.
Double Parabolic Bright aluminum Louvre: Manufactured of (99,9%) pure bright aluminum.

Code	Lamp	Color
DFG 114/DP1	1x14W FH	Gray
DFG 128/DP1	1x28W FH	Gray
DFG 154/DP1	1x54W FQ	Gray

Box Dimensions


Inside box 1 PCS.
 DFG 114/DP1 130x 620x100 mm
 DFG 128/DP1 130x1220x100 mm
 DFG 154/DP1 130x1220x100 mm

Cut-out: DFG 114/DP1 115x 604 mm
 DFG 128/DP1 115x1204 mm
 DFG 154/DP1 115x1204 mm

Weight

DFG 114/DP1 3.100 gr
 DFG 128/DP1 6.200 gr
 DFG 154/DP1 6.200 gr

Protection: IP20



DFG/OP



Description

Body: Extruded aluminum painted with min. 80 micron electrostatic powder paint.
Opal Diffuser: Manufactured of 2.8 mm thick opal acrylic.

Code	Lamp	Color
DFG 114/OP	1x14W FH	Gray
DFG 128/OP	1x28W FH	Gray
DFG 154/OP	1x54W FQ	Gray

Box Dimensions


Inside box 1 PCS.
 DFG 114/OP 130x 620x100 mm
 DFG 128/OP 130x1220x100 mm
 DFG 154/OP 130x1220x100 mm

Cut-out: DFG 114/OP 115x 604 mm
 DFG 128/OP 115x1204 mm
 DFG 154/OP 115x1204 mm


Weight

DFG 114/OP 3.100 gr
 DFG 128/OP 6.200 gr
 DFG 154/OP 6.200 gr

Protection: IP20



Dimensions

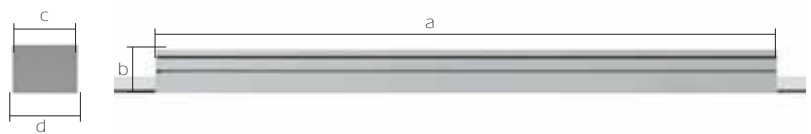

Code	a	b	c	d
DFG 114	600 mm	85 mm	110 mm	126 mm
DFG 128	1200 mm	85 mm	110 mm	126 mm
DFG 154	1200 mm	85 mm	110 mm	126 mm
DFG 135	1500 mm	85 mm	110 mm	126 mm