



DFR SL/80



Description

Body: Extruded aluminum painted with min.80 micron electrostatic powder paint.
Opal Diffuser: Manufactured of 2,8 mm thick opal acrylic.

Code	Lamp	Color
DFR/SL 1x	Single Lenght 1x(14W-24W-21W-39W) 1x(28W-54W-35W-49W-80W)	Gray/White
DFR/SL 2x	Single Lenght 2x(14W-24W-21W-39W) 2x(28W-54W-35W-49W-80W)	Gray/White
DFR/SL 1x	Double Lenght 1x(14W-24W-21W-39W) 1x(28W-54W-35W-49W-80W)	Gray/White
DFR/SL 2x	Double Lenght 2x(14W-24W-21W-39W) 2x(28W-54W-35W-49W-80W)	Gray/White
DFR/SL 1x	Triple Lenght 1x(14W-24W-21W-39W) 1x(28W-54W-35W-49W-80W)	Gray/White
DFR/SL 2x	Triple Lenght 2x(14W-24W-21W-39W) 2x(28W-54W-35W-49W-80W)	Gray/White

Box Dimensions

Inside box 1 PCS.


DFR/SL 180 1510x110x80 mm
 DFR/SL 228 2310x110x80 mm

Weight

DFR/SL 180 2.520 gr
 DFR/SL 228 3.900 gr

Protection: IP20

Dimensions

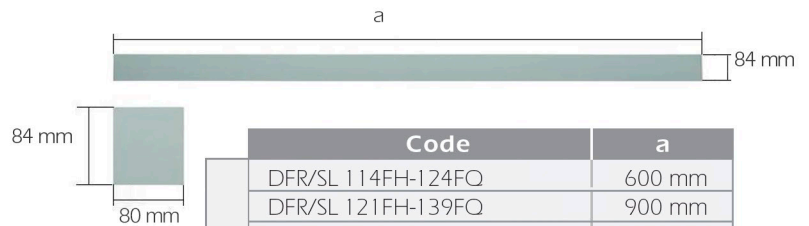

	Code	a
Single	DFR/SL 114FH-124FO	600 mm
	DFR/SL 121FH-139FO	900 mm
	DFR/SL 128FH-154FO	1200 mm
	DFR/SL 135FH-149FO-180FO	1500 mm
	DFR/SL 214FH-224FO	697 mm
	DFR/SL 221FH-239FO	997 mm
	DFR/SL 228FH-254FO	1297 mm
	DFR/SL 235FH-249FO-280FO	1597 mm
Double	DFR/SL 114FH-124FO	1118 mm
	DFR/SL 121FH-139FO	1708 mm
	DFR/SL 128FH-154FO	2278 mm
	DFR/SL 135FH-149FO-180FO	2878 mm
	DFR/SL 214FH-224FO	1285 mm
	DFR/SL 221FH-239FO	1885 mm
	DFR/SL 228FH-254FO	2485 mm
	DFR/SL 235FH-249FO-280FO	3085 mm
Triple	DFR/SL 114FH-124FO	1636 mm
	DFR/SL 121FH-139FO	2516 mm
	DFR/SL 128FH-154FO	3356 mm
	DFR/SL 135FH-149FO-180FO	4256 mm
	DFR/SL 214FH-224FO	1873 mm
	DFR/SL 221FH-239FO	2773 mm
	DFR/SL 228FH-254FO	3673 mm
	DFR/SL 235FH-249FO-280FO	4573 mm