
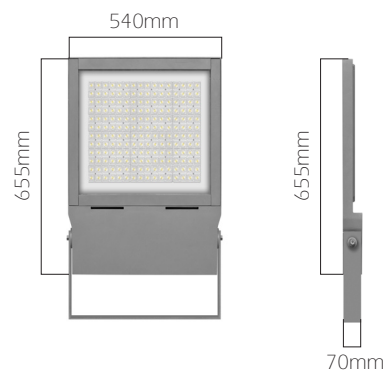


HCL floodlights are products with high luminous efficiency. With its IP65 protected body and corrosion resistant antistatic paint coating, it offers a long service life. The sealing is at the highest level by using silicone gasket at the points where the cover and glass meet the body.

- Body: Aluminum injection
- Led: Power or Mid-Power
- Front Glass: 5mm thick tempered glass
- Driver : Included

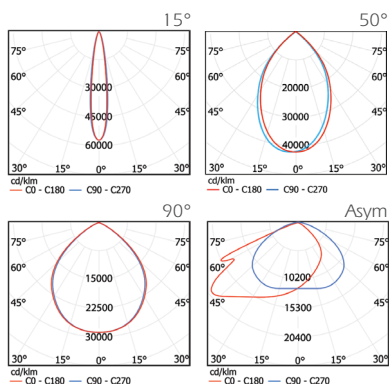

Code	Beam	Luminous Flux	System Power	Voltage	Colour Temperature	Weight
HCL 500 NB	15°	57.000	500 W	220V-50Hz	3000-4000-5000-6500K	17.5kg
HCL 500 MB	50°	61.000	500 W	220V-50Hz	3000-4000-5000-6500K	17.5kg
HCL 500 WB	90°	60.000	500 W	220V-50Hz	3000-4000-5000-6500K	17.5kg
HCL 450 AS	Asymmetrical	58.000	500 W	220V-50Hz	3000-4000-5000-6500K	17.5kg