

Garden Lighting

D-LFA / D-LFB

IP65



D-LFB9



D-LFK9



D-LFA4



D-LFK4






D-LFA3



D-LFK3

Special lighting system designed with high efficiency LED technology within range of 4 to 12 W for outdoor applications. Can also be employed in architectural garden lighting, tree lighting and for highlighting details.

Durability in all kinds of outdoor conditions thanks to corrosion-resistant cast aluminum outer body thereof. Two different types of mounting options are offered. The models include the type with foot anchored to the ground and the type with foot driven into the ground.

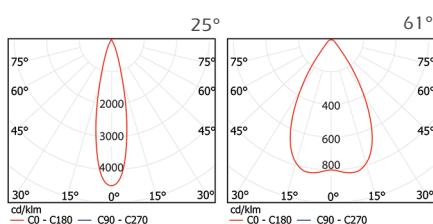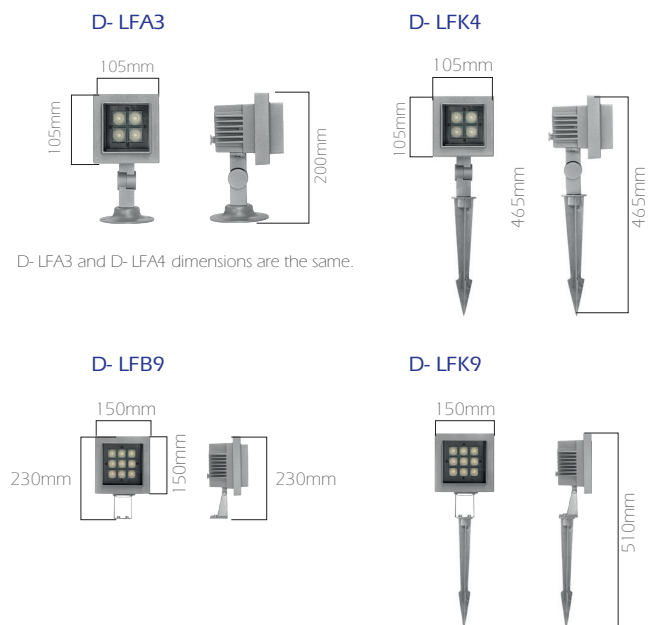

Code	D-LFA3 / D-LFK3	D-LFA4 / D-LFK4	D-LFB9 / D-LFK9
LED	High Efficiency Power LED		
System Power	4 W	5,5 W	12 W
Light Flux	260 lm	350 lm	800 lm
Colour Temperature	3000 - 4000 - 5000 K, R-G-B - Amber		
Voltage	220V - 50Hz		
Body	Aluminum injection painted with electrostatic paint		
Cooler	Cooling from the body surface		
Lens Angle	12°, 25°, 29°, 61° Lens		
Glass	3 mm thickness tempered		
Colour	Grey		
Box Dimensions	15x15x20cm 15x15x30cm	15x15x20cm 15x15x30cm	18x18x25cm
Weight	800 gr	800 gr	1.590 gr